


# ALPINE

## A1RE-D56, A1RE-D57 3.5" Adjustable Downlight

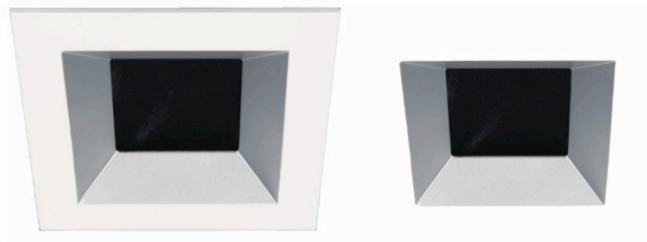


Fixture Type:

Catalog Number:

Project:

Location:

### FINISHES



Trim (Order Housing Separately)	Model	Beam	Color Temp	Lumens	CBCP	Finish
	A1RE-D56 Square Trim Downlight & Adjustable	Spot 16°	27 2700K 30 3000K	865 930	5030 5408	HZWT Haze/White WT White
		Narrow Flood 36°	27 2700K 30 3000K	860 925	1452 1561	
		Flood 51°	27 2700K 30 3000K	795 855	829 891	
	A1RE-D57 Square Trimless Downlight & Adjustable	Spot 16°	27 2700K 30 3000K	865 930	5030 5408	HZ Haze WT White
		Narrow Flood 36°	27 2700K 30 3000K	860 925	1452 1561	
		Flood 51°	27 2700K 30 3000K	795 855	829 891	

### A1RE-D5\_-----

Example: A1RE-D56-WT

### SPECIFICATIONS

<b>Construction:</b>	Die-cast Aluminum trim and heat sink
<b>Power:</b>	13.5W
<b>Input:</b>	120-277V, 50/60Hz
<b>Dimming:</b>	100% - 1% TRIAC, ELV 100% - 5%, 0-10V
<b>Light Source:</b>	High output COB LED
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Retention clip firmly hold trim to housing Cut Out: 4 1/4" x 4 1/4" New Construction Housing 3 7/8" x 3 7/8" Remodel Housing
<b>Finish:</b>	Powder Coated White, enamel-coated haze.
<b>Ceiling Thickness:</b>	1/2" - 1"
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Wet Location Listed, Title 24 JA8-2019 Compliant, IC, Airtight

### DESCRIPTION

ALPINE offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

### FEATURES

- 3 beam angel options included:
- Narrow flood beam film pre-installed, interchangeable flood beam film supplied, remove film for spot beam
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing:
- Vertical Adjustment 0-30°, Horizontal Adjustment 360°
- Shallow housing under 4" depth
- 5 year warranty

aispire.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# ALPINE

## A1RE-D56, A1RE-D57 3.5" Adjustable Downlight

Housing (Required) - Order separately from trims

Model

Power

Color Temp

	<b>A1RE-258M</b> IC-Rated Airtight	13.5W	<b>27</b> 2700K  <b>30</b> 3000K
	<b>A1RE-356M</b> Non IC- Rated Airtight	13.5W	<b>27</b> 2700K  <b>30</b> 3000K
	<b>A1RE-357M</b> Non IC- Rated Airtight	13.5W	<b>27</b> 2700K  <b>30</b> 3000K

### A1RE-\_\_ M-\_\_

Example: **A1RE-258M-27**

#### FEATURES

- Adjustable LED light engine included with housing:  
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Trim or trimless with die-cast spackle frame included
- Accepts one optional honeycomb louver or optical lens

#### GLARE CONTROL ACCESSORIES sold separately

<b>LENS-16</b>	<b>HCL</b>	Honeycomb Louver
----------------	------------	------------------

#### LENS ACCESSORIES sold separately

<b>LENS-16</b>	<b>AMB</b>	Amber
	<b>RED</b>	Red
	<b>FR</b>	Frosted
	<b>SPR</b>	Spread
	<b>BEL</b>	Beam Elongating