



# ALPINE

## A1RE-W56, A1RE-W57 3.5" Wall Wash

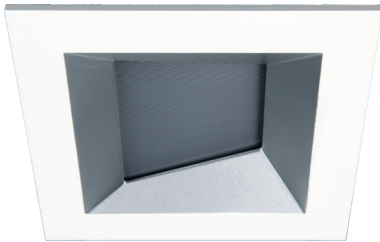

Fixture Type:

Catalog Number:

Project:

Location:

### FINISHES



White



Haze/White



Haze

	Model	Beam	Color Temp	Lumens	CBCP	Finish
	<b>A1RE-W56</b> (Square Trim Wall Wash)	Asymmetrical	27 2700K 30 3000K	615 660	N/A	WT White HZWT Haze/White
	<b>A1RE-W57</b> (Square Trimless Wall Wash)	Asymmetrical	27 2700K 30 3000K	615 660	N/A	WT White HZ Haze

Example: **A1RE-W56-WT**

### DESCRIPTION

Alpine offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

### FEATURES

- 3 beam angle options included: For Wall Wash trim optimal optics is light engine with no film installed. Non IC and IC-Rated,
- IC-Rated, Airtight, New Construction,
- Adjustable LED light engine included with housing
- Shallow housing under 4" depth
- 5 year warranty

### SPECIFICATIONS

<b>Construction:</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	13.5W
<b>Input:</b>	120V-277V 50/60Hz
<b>Dimming:</b>	100% - 1% TRIAC, ELV 100% - 5%, 0-10V
<b>Light Source:</b>	High output COB LED rated life of 50,000 hours.
<b>Mounting:</b>	Retention clips firmly hold trim to housing.  Cut Out: 4 1/4" x 4 1/4" New Construction Housing 3 7/8" x 3 7/8" Remodel Housing
<b>Finish:</b>	Powder coated
<b>Ceiling Thickness:</b>	1/2" - 1"
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL & cUL, Wet location listed. Title 24 JA8-2019 Compliant

# Alpine

## A1RE-W56, A1RE-W57 3.5" Wall Wash



Model	Model	Power	Color Temp
	<b>A1RE-258M</b> IC-Rated Airtight	13.5W	<b>27</b> 2700K <b>30</b> 3000K
	<b>A1RE-356M</b> Non IC Airtight	13.5W	<b>27</b> 2700K <b>30</b> 3000K
	<b>A1RE-357M</b> Non IC Airtight	13.5W	<b>27</b> 2700K <b>30</b> 3000K

Example: **A1RE-258M-27**

### FEATURES

- Adjustable LED light engine included with housing: Optimal Vertical Adjustment for Wall Wash is 15° indexed position
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

### GLARE CONTROL ACCESSORIES sold separately

<b>LENS-16</b>	<b>HCL</b> Honeycomb Louver
----------------	-----------------------------

### LENS ACCESSORIES sold separately

<b>LENS-16</b>	<b>AMB</b> Amber <b>RED</b> Red <b>FR</b> Frosted <b>SPR</b> Spread <b>BEL</b> Beam Elongating
----------------	--

aispire.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760