

A1RS-2491, 2492-C2 (A,B); A1RS-2591, 2592-C2 (A,B)

QUARTUS ATMOSPHERE 2" NEW CONST Millwork Housing



SPECIFICATIONS

Input: Universal 120-277V AC 50/60 Hz

Standards: ETL & cETL, IC-rated, Airtight

Dimming: DMX512-A RDM: 100-0.1%

Mounting: New construction housings included with universal mounting brackets and hanger bars
Ceiling Cutout (Round): Ø 3-1/8"
Ceiling Cutout (Square): 2-9/16" x 2-9/16"
See next page for ceiling thickness information

Construction: 20 Gauge galvanized steel

Warranty: 8 year product warranty


Fixture Type:

Catalog Number:

Project:

Location:


Round, New Construction Millwork

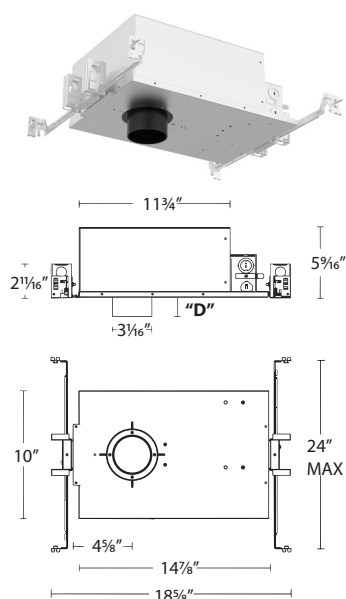

Model Collar Depth "D"

A1RS-2491A-C2	3/4"
A1RS-2491B-C2	1-1/2"

Square, New Construction Millwork

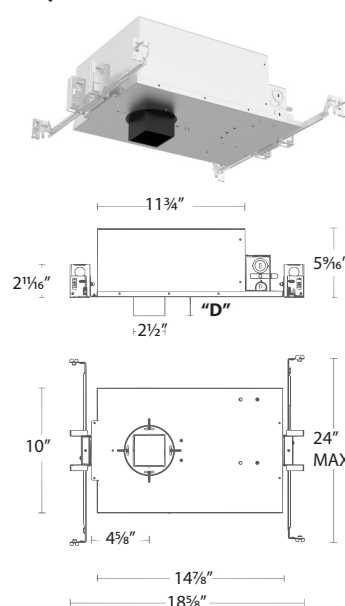

Model Collar Depth "D"

A1RS-2591A-C2	3/4"
A1RS-2591B-C2	1-1/2"

HOUSINGS	Model	Ceiling Thickness		Power	Rating
New Construction Millwork Round	A1RS-2491A-C2 A1RS-2492A-C2	A: 0.25" to 0.75"	Airtight	14W 18W	IC IC
	A1RS-2491B-C2 A1RS-2492B-C2	B: 0.75" to 1.5"	Airtight	14W 18W	IC IC
New Construction Millwork Square	A1RS-2591A-C2 A1RS-2592A-C2	A: 0.25" to 0.75"	Airtight	14W 18W	IC IC
	A1RS-2591B-C2 A1RS-2592B-C2	B: 0.75" to 1.5"	Airtight	14W 18W	IC IC

A1RS-____-C2

Example: A1RS-2491A-C2

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761

A1RS-2491, 2492-C2 (A,B); 1RS-2591, 2592-C2 (A,B)

QUARTUS ATMOSPHERE 2" NEW CONST Millwork Housing




REPLACEMENT DRIVER

Housing Model	Power	Replacement Driver Model
A1RS-2491A-C2, A1RS-2491B-C2, A1RS-2591A-C2, A1RS-2591B-C2	14W	D-A1RS-21-C2
A1RS-2492A-C2, A1RS-2492B-C2, A1RS-2592A-C2, A1RS-2592B-C2	18W	D-A1RS-22-C2

MILLWORK HOUSING APPLICATION TABLE FOR WOOD/MILLWORK CEILING

Millwork Housing	Trim Model	Trim Description	Ceiling Thickness				
			1/4"	1/2"	3/4"	1"	1-1/2"
A1RS-249*A-C2 Round 1/4" to 3/4"	A1RS-D47M-C2	Downlight	Yes	Yes	Yes	N/A	
	A1RS-A47M-C2	Adjustable	Yes, to 35°	Yes, to 35°	Yes, to 35°		
	A1RS-W47A-C2	Wall Wash	Yes	Yes	Yes		
A1RS-249*B-C2 Round 3/4" to 1-1/2"	A1RS-D47M-C2	Downlight	N/A		Yes	Yes	Yes
	A1RS-A47M-C2	Adjustable			Yes, to 12°	Yes, to 12°	Yes, to 12°
	A1RS-W47A-C2	Wall Wash			Yes	Yes	Yes
A1RS-259*A-C2 Square 1/4" to 3/4"	A1RS-D57M-C2	Downlight	Yes	Yes	Yes	N/A	
	A1RS-A57M-C2	Adjustable	Yes, to 25°	Yes, to 25°	Yes, to 25°		
	A1RS-W57A-C2	Wall Wash	Yes	Yes	Yes		
A1RS-259*B-C2 Square 3/4" to 1-1/2"	A1RS-D57M-C2	Downlight	N/A		Yes	Yes	Yes
	A1RS-A57M-C2	Adjustable			Yes, to 8°	Yes, to 8°	Yes, to 8°
	A1RS-W57A-C2	Wall Wash			Yes	Yes	Yes

MILLWORK INSTALLATION OVERVIEW

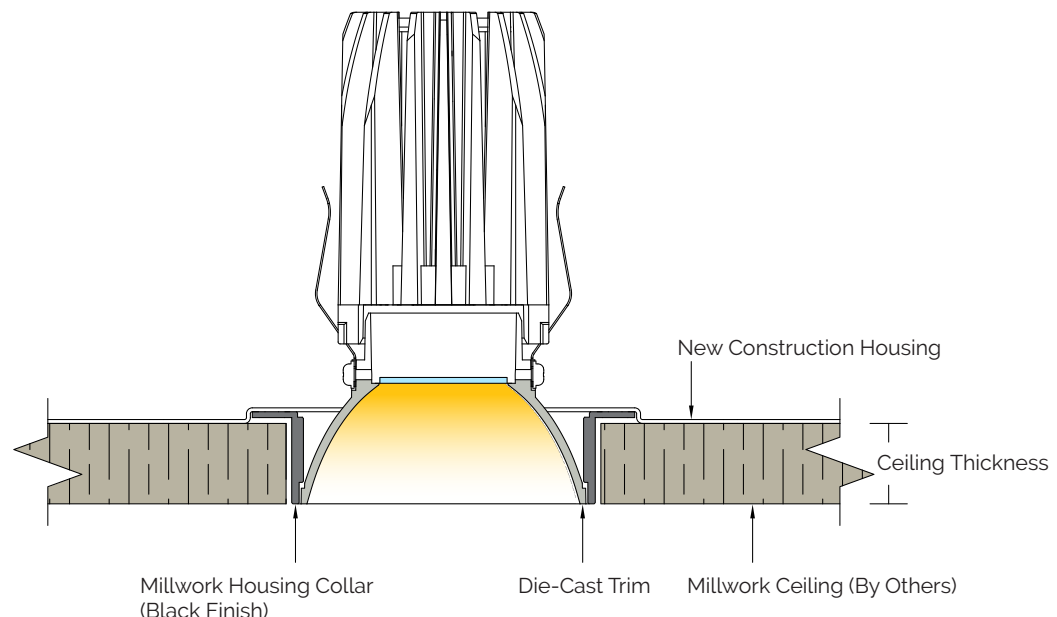

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761