

A1RS-2491, 2492, 1493 (A,B); A1RS-2491, 2492, 1493 (A,B); QUARTUS ALPINE 2" NEW CONST Millwork Housing



SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL, IC-rated, Airtight, SPCL (Spray Foam Compatible Luminaire), up to R6.8 per inch, as per UL 1598
Dimming:	Electronic Low Voltage (ELV): 100%-1% TRIAC: 100%-1%, 0-10V: 100-1%
Mounting:	New construction housings included with universal mounting brackets and hanger bars Ceiling Cutout (Round): Ø 3-1/8" Ceiling Cutout (Square): 2-9/16" x 2-9/16" See next page for ceiling thickness information
Construction:	20 Gauge galvanized steel
Warranty:	8 year product warranty


Fixture Type:

Catalog Number:

Project:


Location:

Round, New Construction Millwork

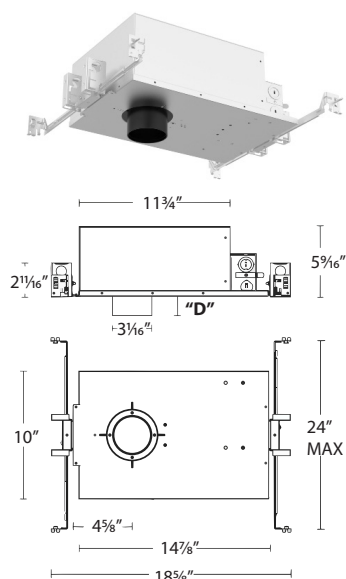

Model	Collar Depth "D"
A1RS-249*/159*A	3/4"
A1RS-249*/159*B	1-1/2"

Square, New Construction Millwork

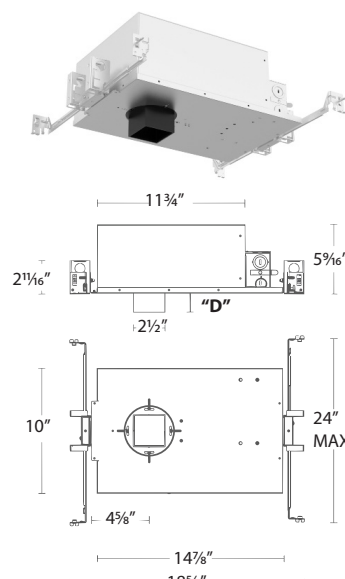

Model	Collar Depth "D"
A1RS-259*/159*A	3/4"
A1RS-259*/159*B	1-1/2"

HOUSINGS	Model	Ceiling Thickness	Power	Rating
New Construction Millwork Round	A1RS-2491A A1RS-2492A A1RS-1493A	A: 0.25" to 0.75"	Airtight	15W 21W 25W IC, SPCL IC Non-IC
	A1RS-2491B A1RS-2492B A1RS-1493B	B: 0.75" to 1.5"	Airtight	15W 21W 25W IC, SPCL IC Non-IC
	A1RS-2591A A1RS-2592A A1RS-1593A	A: 0.25" to 0.75"	Airtight	15W 21W 25W IC, SPCL IC Non-IC
New Construction Millwork Square	A1RS-2591B A1RS-2592B A1RS-1593B	B: 0.75" to 1.5"	Airtight	15W 21W 25W IC, SPCL IC Non-IC

A1RS-_____

Example: A1RS-2491A

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761

**A1RS-2491, 2492, 1493 (A,B);
A1RS-2591, 2592, 1593 (A,B)**
QUARTUS ALPINE 2" NEW CONST Millwork Housing




REPLACEMENT DRIVER

<i>Housing Model</i>	<i>Power</i>	<i>Replacement Driver Model</i>
A1RS-2491A, A1RS-2491B, A1RS-2591A, A1RS-2591B	15W	D-R2FN-1
A1RS-2492A, A1RS-2492B, A1RS-2592A, A1RS-2592B	21W	D-R2FN-2
A1RS-1493A, A1RS-1493B, A1RS-1593A, A1RS-1593B	25W	D-R2FN-3

MILLWORK HOUSING APPLICATION TABLE FOR WOOD/MILLWORK CEILING

Millwork Housing	Trim Model	Trim Description	Ceiling Thickness				
			1/4"	1/2"	3/4"	1"	1-1/2"
A1RS-249*/149*A Round 1/4" to 3/4"	A1RS-D47M	Downlight	Yes	Yes	Yes	N/A	
	A1RS-A47M	Adjustable	Yes, to 35°	Yes, to 35°	Yes, to 35°		
	A1RS-W47A	Wall Wash	Yes	Yes	Yes		
A1RS-249*/149*B Round 3/4" to 1-1/2"	A1RS-D47M	Downlight	N/A		Yes	Yes	Yes
	A1RS-A47M	Adjustable			Yes, to 12°	Yes, to 12°	Yes, to 12°
	A1RS-W47A	Wall Wash			Yes	Yes	Yes
A1RS-259*/159*A Square 1/4" to 3/4"	A1RS-D57M	Downlight	Yes	Yes	Yes	N/A	
	A1RS-A57M	Adjustable	Yes, to 25°	Yes, to 25°	Yes, to 25°		
	A1RS-W57A	Wall Wash	Yes	Yes	Yes		
A1RS-259*/159*B Square 3/4" to 1-1/2"	A1RS-D57M	Downlight	N/A		Yes	Yes	Yes
	A1RS-A57M	Adjustable			Yes, to 8°	Yes, to 8°	Yes, to 8°
	A1RS-W57A	Wall Wash			Yes	Yes	Yes

MILLWORK INSTALLATION OVERVIEW

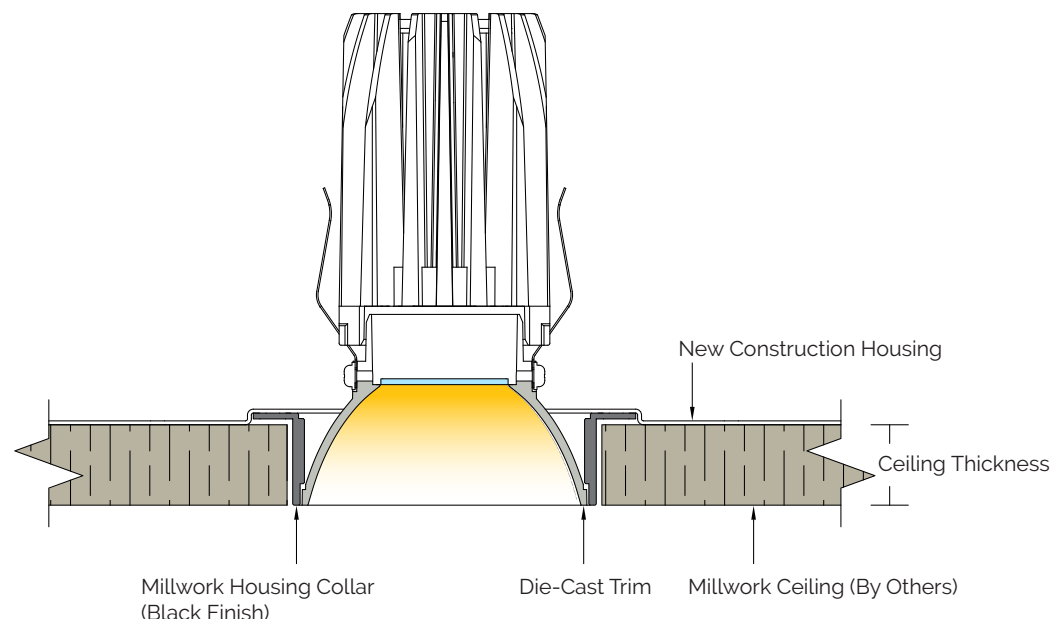

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761