

A1RT-2661-DW, A1RT-2662-DW, A1RT-2471-DW A1RT-2472-DW, A1RT-2571-DW, A1RT-2572-DW QUARTUS ASTRO 4" New Construction Housing



SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL, IC-rated, Airtight (see below for list) , SPCL (Spray Foam Compatible Luminaire), up to R6.8 per inch, as per UL 1598
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100-1%
Mounting:	New construction housings included with universal mounting brackets and hanger bars Ceiling cutout (Round and Square): Ø 4 ¾" Ceiling thickness: ½" - 1"
Construction:	20 Gauge galvanized steel
Warranty:	8 year product warranty


Fixture Type:

Catalog Number:


Project:

Location:

New Construction Trimmed

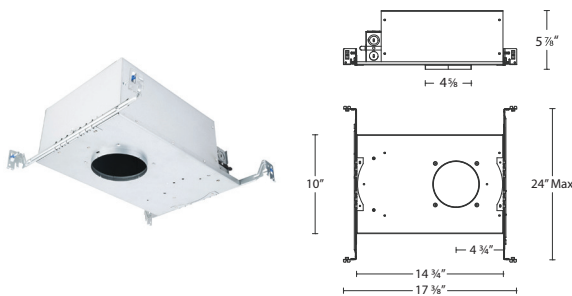

New Construction Trimless

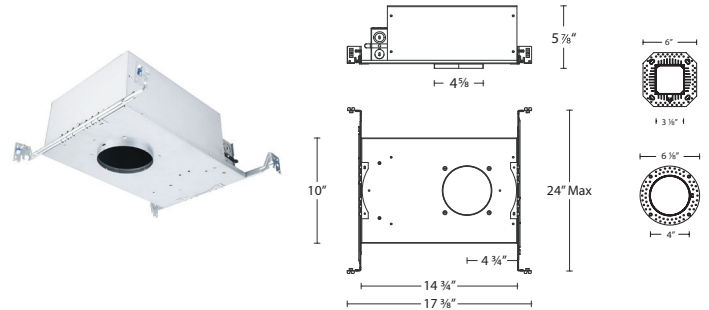

HOUSINGS	Model			Power	Rating	Compatible Trims
New Construction Trimmed	A1RT-2661-DW A1RT-2662-DW	Round and Square	Airtight	13W 19W	IC, SPCL IC, SPCL	A1RT-D46M-DW A1RT-D56M-DW A1RT-A46M-DW A1RT-A56M-DW A1RT-W46A-DW A1RT-W56A-DW
New Construction Trimless	A1RT-2471-DW A1RT-2472-DW	Round (Spackle frame included)	Airtight	13W 19W	IC, SPCL IC, SPCL	A1RT-D47M-DW, A1RT-A47M-DW A1RT-W47A-DW
	A1RT-2571-DW A1RT-2572-DW	Square (Spackle frame included)	Airtight	13W 19W	IC, SPCL IC, SPCL	A1RT-D57M-DW, A1RT-A57M-DW A1RT-W57A-DW

A1RT-____-DW

Example: A1RT-2661-DW

REPLACEMENT DRIVER

Housing Model	Power	Replacement Driver Model
A1RT-2661-DW, A1RT-2471-DW, A1RT-2571-DW A1RT-2662-DW, A1RT-2472-DW, A1RT-2572-DW	13W 19W	D-R4FN-1 D-R4FN-2

Example:

For **A1RT-2471-DW** housing, choose replacement driver model **D-R4FN-1**

For **A1RT-2572-DW** housing, choose replacement driver model **D-R4FN-2**

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761