

A1RT-D47M-C2

QUARTUS ATMOSPHERE 4" - Round Downlight Trimless



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION


QUARTUS ATMOSPHERE recessed luminaires merge quality and value with the latest tunable white technology to demonstrate the beauty and power of 90 CRI illumination. The 4" aperture size features a robust lumen output for larger spaces with higher ceilings. The fixtures are also ideal for sunrise/sunset scenes, as well as accenting artwork, furniture and architectural decor while creating personalized and meaningful experiences for your clients.

FEATURES

- Two-piece die-cast construction
- Light engine mounted on trim with springs for easy replacement
- 30° shielding angle design for better visual comfort
- Field changeable beam angle with reflectors provided
- Accepts one Lens or glare control accessory
- 8 year product warranty

SPECIFICATIONS

- Construction:** Durable die-cast aluminum construction
- Input:** Universal 120-277V AC 50/60 Hz
- Dimming:** 2-channel DMX512-A RDM: 100-0.1%
- Light Source:** 3-step Mac Adam Ellipse Tunable White COB
Rated life of 50,000 hours at L70
- Mounting:** Heavy gauge retention clips support trim firmly. Safety cabling standard.
- Finish:** Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.
- Standards:** ETL & cETL Wet Location Listed, Title 24 JA8 Compliant.

	Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	A1RT-D47M Round Trimless	N 27°	1610	4260	C2 1800K - 4000K	90	BK DB HZ WT	Black Dark Bronze Haze White
		F 42°	1660	2865				
		W 55°	1670	2100				

A1RT-D47M-C2__

Example: **A1RT-D47M-C2WT** (Beam F-42° reflector is pre-installed. Beams N-27° and W-55° reflectors are included.)

* Lumens and CBCP are reference values for 3000K trim with 3 housing. Use multiplier table below to determine the output for other combinations.

LUMENS AND CBPC MULTIPLIER						
Housing Power Level	Color Temperature					
	1800K	2200K	2700K	3000K	3500K	4000K
1 (14W)	0.42	0.48	0.53	0.56	0.59	0.63
2 (19W)	0.59	0.67	0.74	0.78	0.83	0.88
3 (26W)	0.76	0.86	0.95	1.00	1.07	1.13

Please see next page for housing units (required)

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters
44 Harbor Park Drive,
Port Washington, NY 11050

Georgia Distribution Center
1600 Distribution Ct,
Lithia Springs, GA 30122

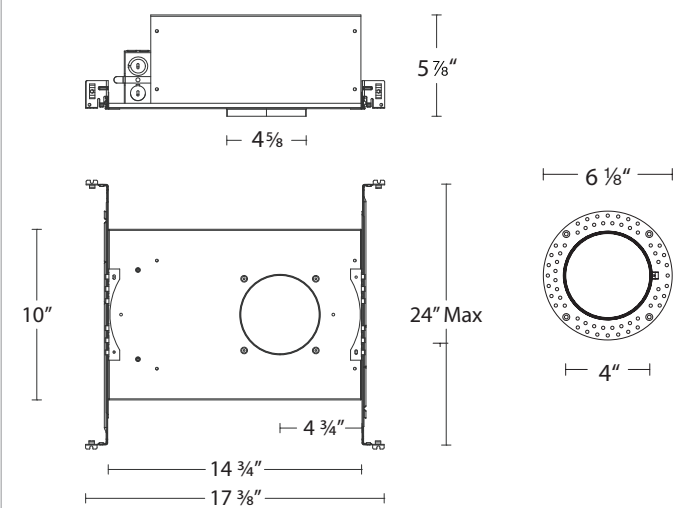
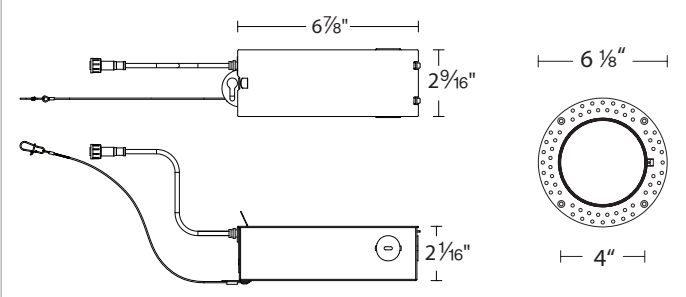
Texas Distribution Center
1700 S J Elmer Weaver Fwy Suite 100,
Cedar Hill, TX 75104

California Distribution Center
1750 S Archibald Ave,
Ontario, CA 91761

A1RT-D47M-C2

QUARTUS ATMOSPHERE 4" - Round Downlight Trimless

HOUSING (Required)

		Model	Power
New Construction IC Airtight		AIRT-2471-C2 AIRT-2472-C2 AIRT-2473-C2	14W IC 19W IC 26W IC
Remodel Non-IC		AIRT-3471-C2 AIRT-3472-C2 AIRT-3473-C2	14W Non-IC 19W Non-IC 26W Non-IC

A1RT-____-C2

Example: AIRT-3471-C2

GLARE CONTROL ACCESSORIES

LENS-16-HCM	<i>Honeycomb Louver</i>
LENS-16P-CRL-BK	<i>Cross Louver</i>

LENS ACCESSORIES

LENS-16	AMB	<i>Amber</i>
	RED	<i>Red</i>
	BLU	<i>Blue</i>
	GRN	<i>Green</i>
	SPR	<i>Spread</i>
	BEL	<i>Beam Elongating</i>