A1RT-W56A-DW

QUARTUS ASTRO 4" - Square Wall Wash Trim





PRODUCT DESCRIPTION

QUARTUS ASTRO Recessed luminaires are high performance Dim-to-Warm LED luminaires with outputs up to 1300 lumens on 4" styles. The series features superlative glare control with 30° shielding, 45° vertical tilting with 360° horizontal rotation, and uniform floor-to-ceiling wall washing. Two power level options and a full line of round and square, trimmed and trimless luminaires deliver versatile lighting solutions for various applications. The QUARTUS recessed family offers outstanding value and quality, backed by exceptional serviceability that includes easy replacement of both the light engine and driver.

FEATURES

- · Two-piece die-cast construction
- $\boldsymbol{\cdot}$ Light engine mounted on trim with springs for easy replacement
- · Designed for even wall illumination both vertically and horizontally
- · 8 year product warranty

Fixture Type:
Catalog Number:
Project:
Location:

SPECIFICATIONS

Construction: Durable die-cast aluminum construction

 Input
 Universal 120-277V AC 50/60 Hz

 Dimming:
 Electronic Low Voltage (ELV): 100%-1%

 Triac: 100%-1%
 0-10V: 100-1%

Light Source: High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

Mounting: Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø4 3/4' Accommodates 1/2 "- 1 1/4 " ceiling thickness

Finish: Electrostatically powder coated White, Black,

Dark Bronze. Enamel coated Haze.

Standards: ETL & cETL Wet Location Listed,

Title 24 JA8 Compliant.

	Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
5 5/8" 	A1RT-W56A Square Trim	A Asym	950	N/A	DW 3000K - 1800K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White

A1RT-W56A-DW___

Example: A1RT-W56A-DWWT

Lumens shown in the table is a reference value for DW trim with 19W housing. Use multiplier table below to determine the output for the other combination.

MULTIPLIER		TRIM		
HOUSING	19W	1.00		
	13W	0.69		


Example: A1RT-W56A-DWWT with 13W housing: 950 lm (Reference Output) x 0.69 (Multiplier) = 655 lm

Please see next page for housing units (required)


aispire.com	Headquarters	Georgia Distribution Center	Texas Distribution Center	California Distribution Center
Phone (800) 526.2588	44 Harbor Park Drive,	1600 Distribution Ct,	1700 S J Elmer Weaver Fwy Suite 100,	1750 S Archibald Ave,
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

1

A1RT-W56A-DW





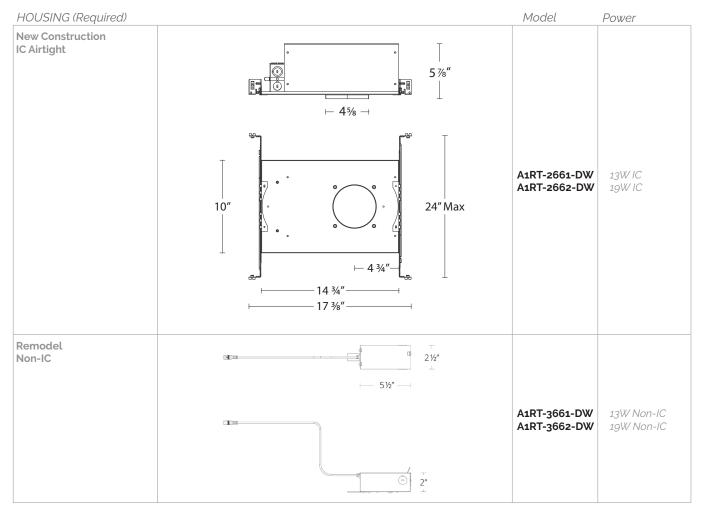

A1RT-____-DW

Example: A1RT-3661-DW