

AiSPIRE LINEAR ASTRO DIM-TO-WARM POWER SUPPLY

60w & 96w REMOTE POWER SUPPLY



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

FINISHES



Black

Model

A2D50-60	60W 24VDC Class 2 Output Dim-To-Warm Power Supply
A2D50-96	96W 24VDC Class 2 Output Dim-To-Warm Power Supply


DESCRIPTION

This class 2 UL & cUL listed enclosed electronics power supply is one of the most exciting LED power supplies available. What makes this Linear Astro Dim-To-Warm power supply unique is that it allows for lowest dimming CCT adjust-ability among 1800K/1900K/2000K/2100K/2200K right on power supply as you gradually dim the light from 3000K /3500K with Linear Astro Dim-To-Warm. It is compatibles with ELV or 0-10V dimmer. Additionally, it features different kinds of protection from over voltage to short circuit. It is incredibly robust and includes a 5 years warranty. It works with an input voltage of 120-277VAC so you can utilize it for many commercial applications. It features an integrated wiring compartment for a streamlined installation.

FEATURES

- Short Circuit, over current, over voltage, over temperature protection
- UL Class 2 Output
- Select and choose desirable lowest CCT
- Universal Input 120-277VAC
- 5 years warranty

LINE DRAWING

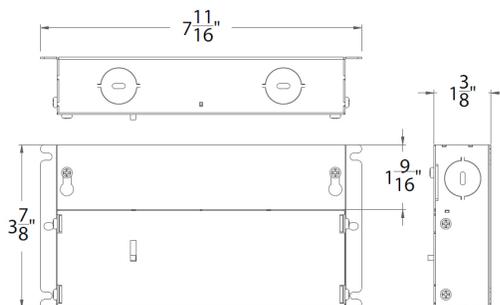

SPECIFICATIONS

Construction:	Metal
Input:	120-277VAC
Output	24VDC
Dimming	ELV, 0-10V
PF	>0.9
THD	<20%
Mounting	Surface Mount
Rated Life	50,000 hours
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL & cUL listed, Damp Location listed, Title 24 Compliant FCC Part 15 Class B Compliant

aispire.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760