


Alpine Micro, Astro Micro

A2RU-W56A - Square Wall Wash Trim

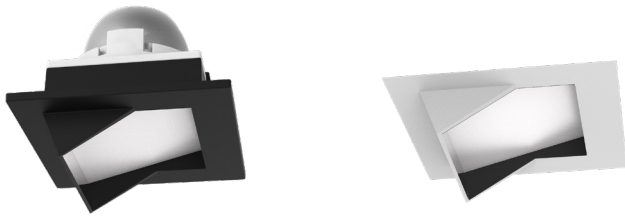

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Alpine/Astro Micro launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

FEATURES

- Uniform wall wash from 1" aperture
- Low glare for good visual comfort
- Low profile housing for installation in shallow plenums
- 5 year warranty

SPECIFICATIONS

Construction:	Injection molded polycarbonate low glare trim
Dimming:	100% - 1% ELV, TRIAC and 0-10V
Input Power:	11W
Light Source:	High output COB LED rated life of 50,000 hours
Finish:	Black, White
Standards:	ETL & cETL Wet location listed, IC rated Airtight

Trims (Order Housing and Power Supply Separately)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	A2RU-W56A Square Wall Wash Trim	A Asym	2700K 3000K 3500K 4000K 3000K - 1800K (DW)	90	520 560 595 635 565	N/A	BK Black WT White

A2RU-W56A-_____

Example: **A2RU-W56A-BK**

Please see next page for housing and power supply units (required)

AVERAGE WALL ILLUMINANCE (3000K Color Temperature, 9 feet High Ceiling)

		On-Center Spacing	
		2 feet	3 feet
Distance From Wall	2 feet	12 fc	Not Recommended
	3 feet	10 fc	7 fc
	4 feet	8 fc	6 fc

Results may vary depending on field conditions such as surface properties, ambient light levels, ect.

Alpine Micro, Astro Micro

A2RU-W56A - Square Wall Wash Trim




Housing (Required) - Order separately from trims

Housing (Required) - Order separately from trims	Model	Power	Color Temp	CRI
	A2RU-256 Square Trim IC-Rated, Airtight	11W	27 2700K 30 3000K 35 3500K 40 4000K DW 3000K -1800K	90

A2RU-256-___

Example: A2RU-256-27

Remote Power Supply (Required) -
Order separately from trims and housings

	Model	Input	Output	Max # of fixtures per channel	Dimmable	
	A2D60-0600A1*	120V - 277V	1 Channel UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	A2D60-0600A6	120V - 277V	6 Channels UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"
	A2D20-BK*	120V	4 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 9 1/8" x 2 7/8"
	A2D40-BK*	120V	8 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 14 15/16" x 2 7/8"

Example: A2D60-0600A6

* Not compatible with "DW" (Dim-to-Warm) housing.

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

Accessory (Sold Separately)	Model	Description
	A2RU-TOOL	Service tool for removing trim and light engine

Example: A2RU-TOOL