


# Alpine Micro, Astro Micro

## A2RU-W57A - Square Wall Wash Trimless

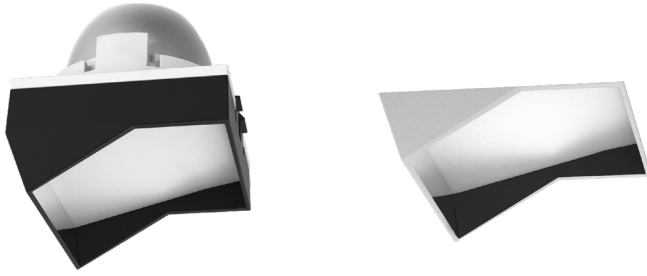

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Alpine/Astro Micro launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

### FEATURES

- Uniform wall wash from 1" aperture
- Low glare for good visual comfort
- Low profile housing for installation in shallow plenums
- 5 year warranty

### SPECIFICATIONS

<b>Construction:</b>	Injection molded polycarbonate low glare trim
<b>Dimming:</b>	100% - 1% ELV, TRIAC and 0-10V
<b>Input Power:</b>	11W
<b>Light Source:</b>	High output COB LED rated life of 50,000 hours
<b>Finish:</b>	Black, White
<b>Ceiling thickness:</b>	1/2" - 2"
<b>Standards:</b>	ETL & cETL Wet location listed, IC rated Airtight

Trims (Order Housing and Power Supply Separately)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	<b>A2RU-W57A</b> Square Wall Wash Trimless	A Asym	2700K 3000K 3500K 4000K 3000K - 1800K (DW)	90	520 580 595 635 565	N/A	<b>BK</b> <b>WT</b> Black White

### A2RU-W57A- ---

Example: **A2RU-W57A-BK**

Please see next page for housing and power supply units (required)

### AVERAGE WALL ILLUMINANCE (3000K Color Temperature, 9 feet High Ceiling)

		On-Center Spacing	
		2 feet	3 feet
Distance From Wall	2 feet	12 fc	Not Recommended
	3 feet	10 fc	7 fc
	4 feet	8 fc	6 fc

Results may vary depending on field conditions such as surface properties, ambient light levels, ect.

# Alpine Micro, Astro Micro

## A2RU-W57A - Square Wall Wash Trimless


Housing (Required) - Order separately from trims

	Model	Power	Color Temp	CRI
	<b>A2RU-457</b> Square Trimless IC-Rated, Airtight	11W	<b>27</b> 2700K	90
			<b>30</b> 3000K	
			<b>35</b> 3500K	
			<b>40</b> 4000K	
			<b>DW</b> 3000K - 1800K	

### A2RU-457-\_\_\_




Example: **A2RU-457-30**

Frame-In Kit (Optional) - Order separately from housings

	Model	Description
	<b>A2RU-167</b>	Frame-In kit for new construction installations

Example: **A2RU-167**

Remote Power Supply (Required) -  
Order separately from trims and housings

	Model	Input	Output	Max # of fixtures per channel	Dimmable	
	<b>A2D60-0600A1*</b>	120V - 277V	1 Channel UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	<b>A2D60-0600A6</b>	120V - 277V	6 Channels UL Class 2	1 per Channel	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"
	<b>A2D20-BK*</b>	120V	4 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 9 1/8" x 2 7/8"
	<b>A2D40-BK*</b>	120V	8 Channels UL Class 2	Up to 2 per Channel	100%-1% DMX 512-A, DMX 512	12 7/16" x 14 15/16" x 2 7/8"

Example: **A2D60-0600A6**

\* Not compatible with "DW" (Dim-to-Warm) housing.

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

	Model	Description
	<b>A2RU-TOOL</b>	Service tool for removing trim and light engine

Example: **A2RU-TOOL**