

# A1RS-266, A1RS-166, A1RS-247, A1RS-147, A1RS-257, A1RS-157

## QUARTUS ALPINE 2" New Construction Housing



### SPECIFICATIONS

<b>Input</b>	Universal 120-277V AC 50/60 Hz
<b>Standards:</b>	ETL & cETL, IC-rated, Airtight (see below for list), SPCL (Spray Foam Compatible Luminaire), up to R6.8 per inch, as per UL 1598
<b>Dimming:</b>	Electronic Low Voltage (ELV): 100%-1% TRIAC: 100%-1%     0-10V: 100-1%
<b>Mounting:</b>	New construction housings included with universal mounting brackets and hanger bars Ceiling cutout (Round and Square): Ø 3 1/2" Ceiling thickness: 1/2" - 1 1/4"
<b>Construction:</b>	20 Gauge galvanized sheet
<b>Warranty:</b>	8 year product warranty


Fixture Type:

Catalog Number:


Project:

Location:

**New Construction Trimmed**

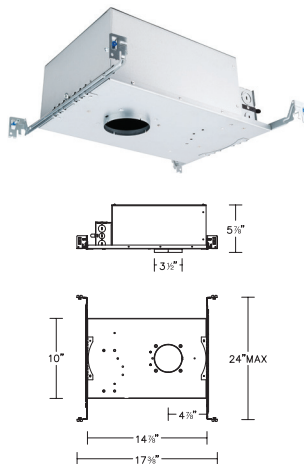

**New Construction Trimless**

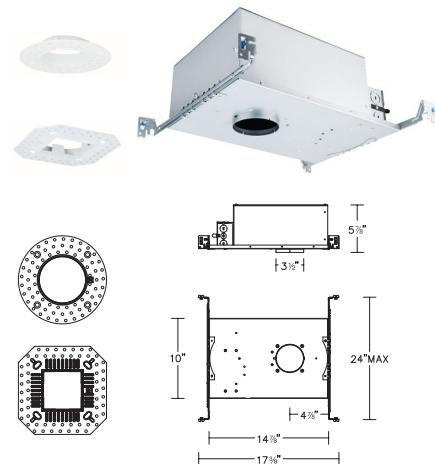

### HOUSINGS

### Model

### Power

### Rating

### Compatible Trims

New Construction Trimmed Round and Square	<b>A1RS-2661</b> <b>A1RS-2662</b> <b>A1RS-1663</b>	Airtight	15W 21W 25W	IC, SPCL IC Non-IC	A1RS-D46M, A1RS-D56M, A1RS-A46M, A1RS-A56M, A1RS-W46A, A1RS-W56A
New Construction Trimless Round (Spackle frame included)	<b>A1RS-2471</b> <b>A1RS-2472</b> <b>A1RS-1473</b>	Airtight	15W 21W 25W	IC, SPCL IC Non-IC	A1RS-D47M, A1RS-A47M, A1RS-W47A
New Construction Trimless Square (Spackle frame included)	<b>A1RS-2571</b> <b>A1RS-2572</b> <b>A1RS-1573</b>	Airtight	15W 21W 25W	IC, SPCL IC Non-IC	A1RS-D57M, A1RS-A57M, A1RS-W57A

Example: **A1RS-2661**

aispire.com  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters**  
44 Harbor Park Drive,  
Port Washington, NY 11050

**Georgia Distribution Center**  
1600 Distribution Ct,  
Lithia Springs, GA 30122

**Texas Distribution Center**  
1700 S J Elmer Weaver Fwy Suite 100,  
Cedar Hill, TX 75104

**California Distribution Center**  
1750 S Archibald Ave,  
Ontario, CA 91761

A1RS-266, A1RS-166, A1RS-247,  
A1RS-147, A1RS-257, A1RS-157

QUARTUS ALPINE 2" New Construction Housing



## REPLACEMENT DRIVER

<i>Housing Model</i>	<i>Power</i>	<i>Replacement Driver Model</i>
<b>A1RS-2661</b> <b>A1RS-2662</b> <b>A1RS-1663</b>	15W/ 21W/ 25W	D-R2FN-1 D-R2FN-2 D-R2FN-3
<b>A1RS-2471</b> <b>A1RS-2472</b> <b>A1RS-1473</b>	15W/ 21W/ 25W	D-R2FN-1 D-R2FN-2 D-R2FN-3
<b>A1RS-2571</b> <b>A1RS-2572</b> <b>A1RS-1573</b>	15W/ 21W/ 25W	D-R2FN-1 D-R2FN-2 D-R2FN-3

Example:

For **A1RS-2472** housing, choose replacement driver model **D-R2FN-2**